
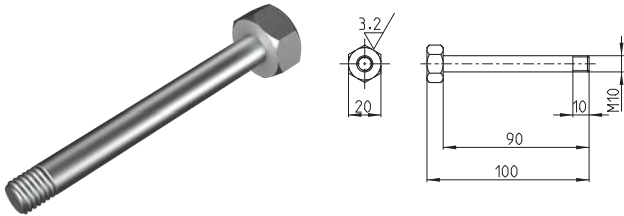



# MANURHIN K'MX 632DUO

Innovative technology

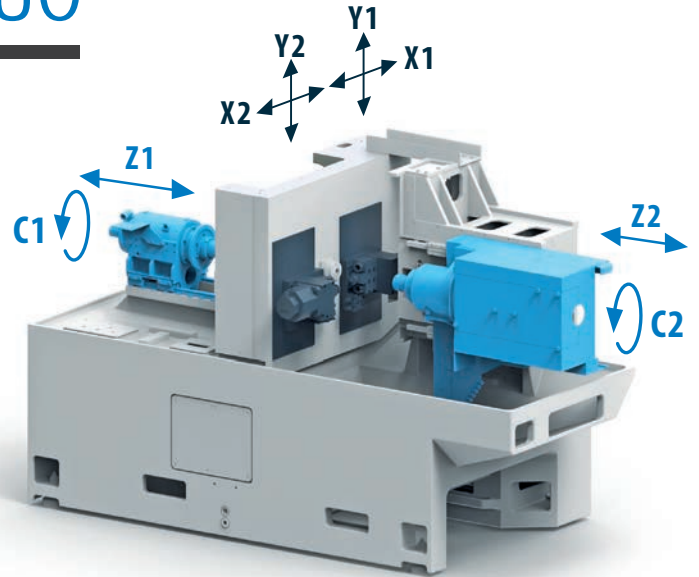


MANURHIN K'MX 632DUO

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
48 sec.	51 sec.	67 sec.	100 sec.

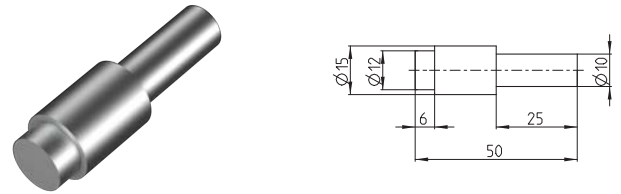


MANURHIN K'MX 632DUO

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
16 sec.	17 sec.	21 sec.	35 sec.

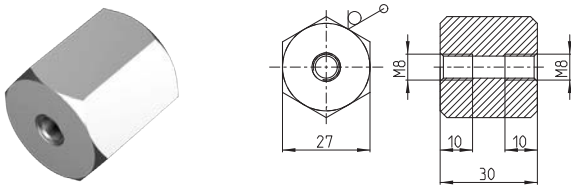


MANURHIN K'MX 632DUO

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
24 sec.	25 sec.	30 sec.	47 sec.

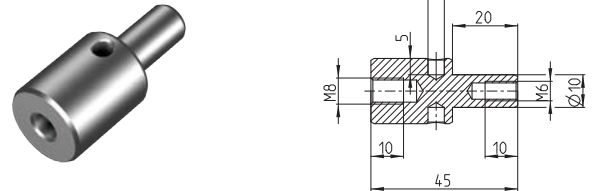


MANURHIN K'MX 632DUO

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
31 sec.	32 sec.	36 sec.	63 sec.

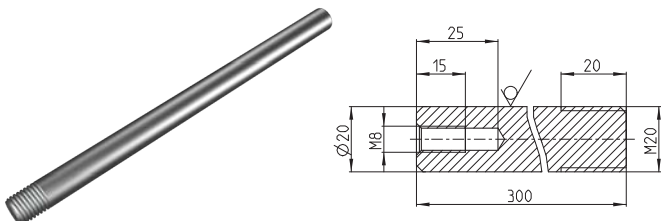

MANURHIN K'MX 632DUO

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
31 sec.	32 sec.	35 sec.	49 sec.

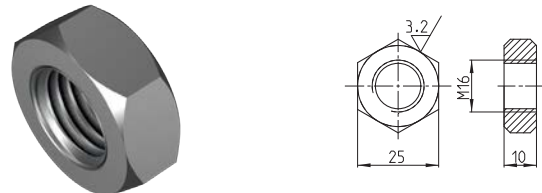

MANURHIN K'MX 632DUO

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
36 sec.	41 sec.	50 sec.	79 sec.

Cycle time is calculated for standard cutting tools, without any special technology, without high pressure coolant and primary with focus on optimal longevity of used cutting tools.