MANURHIN K'MX 816CLEVER

Innovative technology

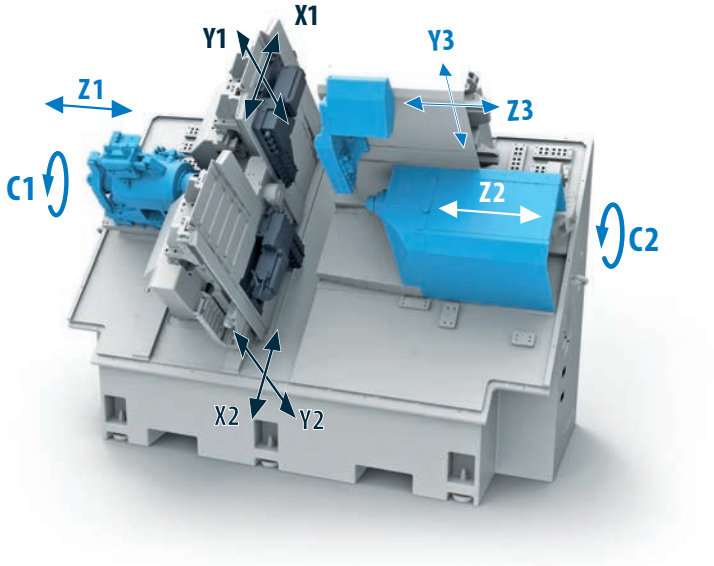



MANURHIN K'MX 816CLEVER

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
12 sec.	13 sec.	14 sec.	16 sec.



MANURHIN K'MX 816CLEVER

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
13 sec.	15 sec.	16 sec.	18 sec.



MANURHIN K'MX 816CLEVER

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
18 sec.	19 sec.	25 sec.	34 sec.

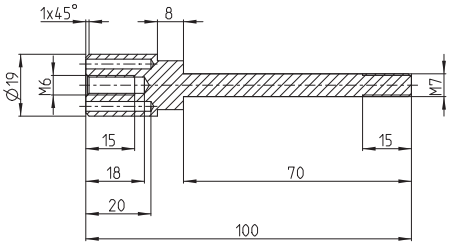

MANURHIN K'MX 816CLEVER

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
27 sec.	37 sec.	49 sec.	83 sec.



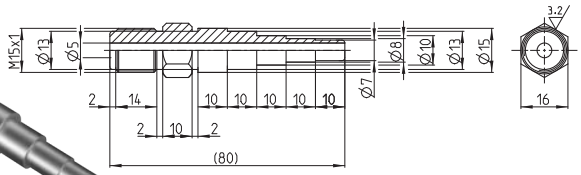

MANURHIN K'MX 816CLEVER

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
34 sec.	38 sec.	49 sec.	72 sec.

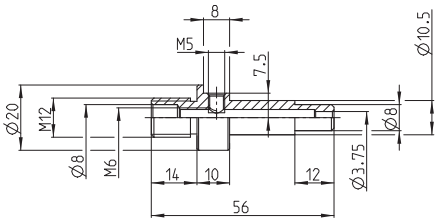

MANURHIN K'MX 816CLEVER

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
32 sec.	38 sec.	40 sec.	51 sec.

Cycle time is calculated for standard cutting tools, without any special technology, without high pressure coolant and primary with focus on optimal longevity of used cutting tools.

TAJMAC-ZPS

MANURHIN K'MX®